

2-Säulen Hebebühnen – Z240 Comfort
2 post lifts – Z240 Comfort

Art.-Nr.
753400





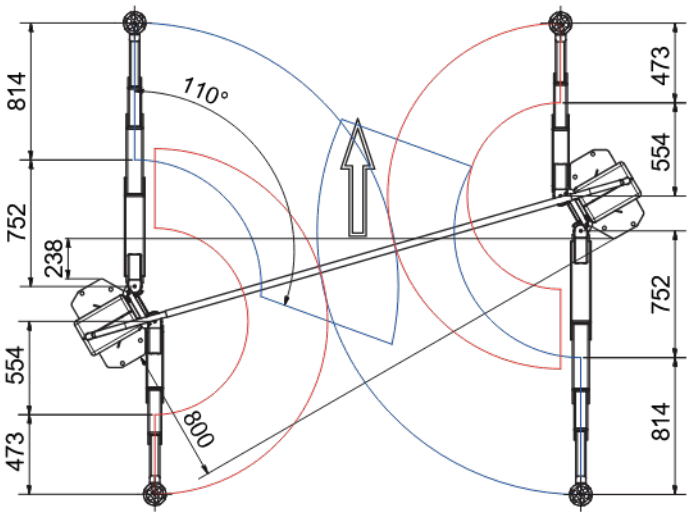

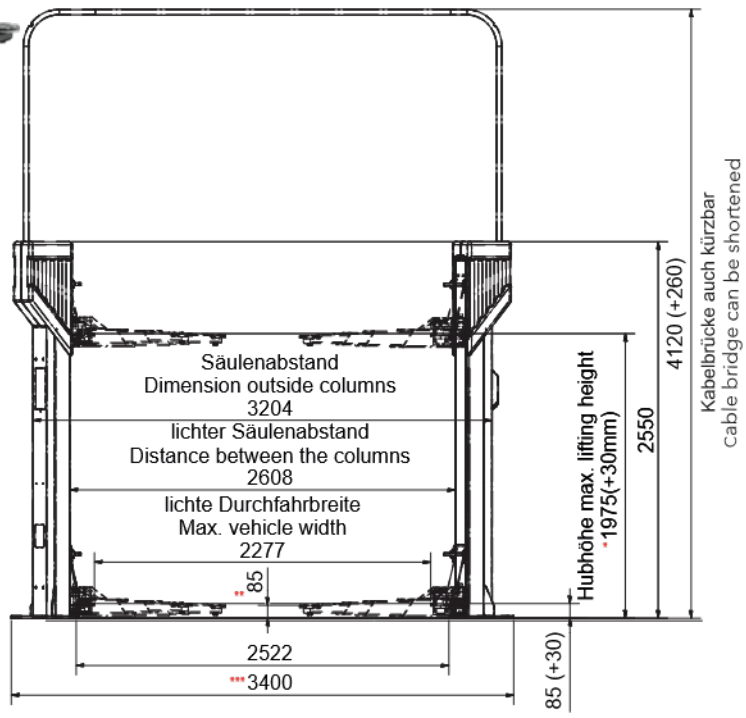

Technische Daten

› Tragfähigkeit	4.000 kg
› Hub- / Senkzeit	ca. 45 s
› Anschluss	400 V / 50 Hz

Konstruktionsmerkmale:

- Tragsäulen aus warmgewalztem Spezialprofil, kein Blech
- 6-fach rollengelagerter Hubwagen
- Tragmutter aus Bronze / Sicherheitsmutter aus Gusslegierung
- Öler zur unterstützenden Schmierung
- Softline-Drucktastensteuerung
- Komplette Säuleninnenraumabdeckung
- Verstellbarer Drehteller (ca. 25 mm)
- Automatische Tragarmarretierung mit manueller Entriegelungsmöglichkeit
- Inkl. Luftanschluss und 230 V Steckdose an Bediensäule

Specifications

› *Capacity*	*4.000 kg*
› *Lifting-/ lowering time*	*ca. 45 s*
› *Power supply (elec.)*	*400 V / 50 Hz*

Equipment:

- *Special hot-rolled section columns, no sheet metal*
- *Carriage guided by 6 rollers*
- *Bronze load nut / cast alloy safety nut*
- *Oil dispenser for supporting lubrication*
- *Softline push button control with computer guided leveling system*
- *Complete covering of post interior*
- *Adjustable pick up plate (approx. 25 mm)*
- *Automatic arm locking mechanism with manual release function*
- *Incl. air connection and 230 V socket on control post*